LRBS

Lashing-Load ring for welding.

Product features:

- Bracket can be pivoted through 180°.
- LC possible up to 90° in load ring plane.
- Clear indication of the minimum lashing capacity in daN.
- For use on loading areas and loads.
- Split force introduction thanks to multiple point fixing.

LRBS 8000 daN
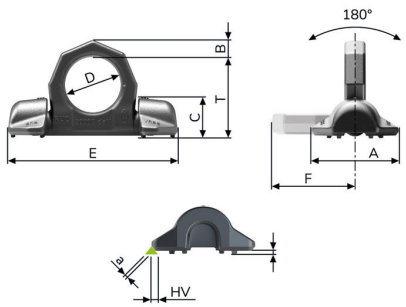
LC [daN]	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	Weight [kg]	Ref. No.
8,000	65	62	16	28	48	135	71	0,77	7993148