VSAK-2

VIP-Special master links with welded-in connectors.

4:1 | -40° 200°C | 380°C max. | BLUE-ID

RUD RFID CONNECT IT

Product features:

- All special master links on this page are equipped with welded-in connectors that can be moved on all sides.
- This results in a non-mix-up connection to chain diameter and number of strands.
- The master link is supplemented with an identification tag (VKZA) with integrated chain test gauge.
- Due to the greater diameter of the inner width “B” of the VSAK reduces an unauthorised use (DGUV rule 109-017) and wear occurrence on the crane hook. This saves a costly intermediate suspension for oversized crane hooks.

VSAK-2-10 / 190

WLL 0-45° [kg]	WLL 45-60° [kg]	T [mm]	A [mm]	B [mm]	C [mm]	Weight [kg]	Ref. No.
5,600	4,000	481	26	190	350	6,5	7994076

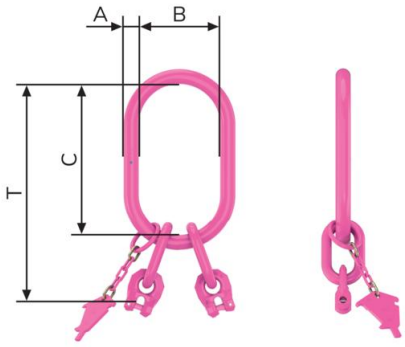

Subject to technical changes!
17.06.2026