VWBG-V

Metric thread with variable length

RUD RFID CONNECT IT

Product features:

- Large WLL range 0.3 t – 5 t
- Clear indication of the minimum WLL for all loading directions. Higher WLL by optimised attachment or application.
- Rotatable 90° to the bolt-on direction under rated WLL.
- Variable bolt lengths available for use in threaded and through holes.
- Non-removable special bolt (do not use unsuitable standard screws).
- RUD bolts with special corrosion protection Corrud-DT.
- Large clearance between the bolt-on surface and load to prevent damage.

VWBG-V-5t-M30 Vario

WLL [kg]	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	M	Ref. No.
5,000	221	22	90	50	99	85	30-330	106	M30	8600336

Weight depends on the design.

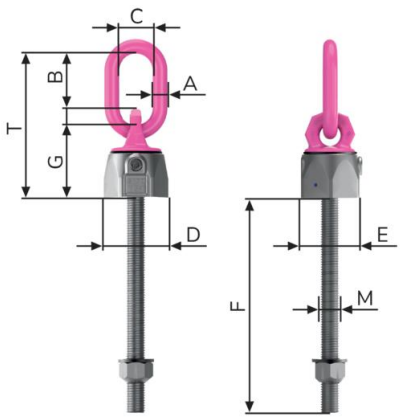

Subject to technical changes!
18.06.2026